



- Standard Capacity: 10.000 LT/H (2.640 GAL/H)
- Standard Pressure: 200 BAR (2.900 PSI)
- Standard Power: 75 kW

## Advantages

- High capacity at low RPM, saving energy
- Efficient homogenization
- Low maintenance costs
- Easy access for maintenance
- Hygienic and ergonomic desing
- Immediate spate parts availability
- Competitive pricing and on time delivers
- Pro-active competent customer service and support
- Suitable for abrasive and high viscosity products

## Options

- 2nd stage homogenizing head
- Plungers in ceramic
- Automation and remote control
- Digital pressure gauge
- Variable frequency drive (VFD)
- Inlet pressure gauge
- Aseptic and sanitary version
- ATEX Compliance
- cGMP support and certification

HIGH-PRESSURE HOMOGENIZER  
H.P. PISTON PUMP

INNOVATIVE  
MANUFACTURING  
*Brand*

## APPLICATION

### Dairy



Milk, UHT Milk,  
Soy Milk, Oat Milk  
Yoghurt, Ayran  
Kefir  
Ice Cream  
Gelato

Labneh, Kashta  
Cream Cheese  
Mascarpone  
Desserts  
Milk Powder  
Spray Dried Products

### Food & Beverage



Fruit Juices  
Fruit Concentrate  
Aromas / Cloudifiers  
Food Emulsions  
Ketchup / Tomato Paste  
Margarine

Tahina  
Hummus  
Caramel Sauce  
Topping Sauce  
Dressing  
Peanut / Hazelnut Paste

### Chemicals and Petrochemical



Greas  
Lubricants  
Paraffin Emulsions  
Silicone Emulsions  
Wax Emulsions  
Mineral oil Emulsions

Polymer Suspensions  
Fungicides, Herbicides  
Latex  
Paint  
Detergents

### Cosmetics



Hair Products  
Beauty Creams  
Moisturizing Creams  
Lotion  
Shampoos  
Half Conditioners

Nail Polishes  
Lipsticks  
Toothpaste  
Collagen  
Perfume  
Waxes

### Pharmaceuticals



Antibiotics  
Creams  
Antacids  
Tablet Coatings  
Liposomes  
Ointments

Syrups  
Vitamins  
Proteins  
Gels  
Vaccines


### Biotechnology



Proteins  
Yeast  
Vitamins  
Bacteria  
Enzymes  
Liposomes

Viruses  
Moss  
Probiotics  
Microorganisms  
Algae  
Celluloses

## Dimensions

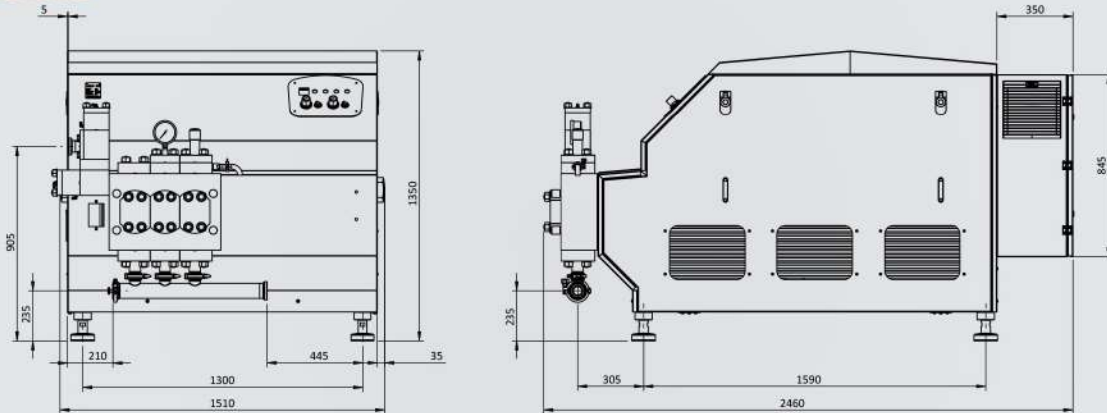

LENGTH mm/in	WIDTH mm/in	HEIGHT mm/in	NET WEIGHT kg/lbs	GROSS WEIGHT kg/lbs	INLET / OUTLET
2460 97	1510 59.5	1350 53	2500 5511	2950 6503.5	DN65 DN50

Measure in mm/in

## Compression Head

- Moonblock head formed by single forged block in high quality SS alloy
- 3-D CAD design, engineered using, FEM and CFD Analysis
- INNOTION function integrating technical R&D and technology focus.
- Surface Roughness: Ra<1.6µm, Ra<0.8µm, Ra<0.5µm (electropolished)
- Designed to avoid sharp edges and stress concentration
- Overpressure relief valve installed
- 10-year warranty against cracks and defects

## Homogenizing Valve

- Designed to be energy efficient with high stability
- Homogenization pressure pneumatic regulating system
- Tungsten carbide, cobalt carbide, Zirconium ceramic and silicon nitride, solid ceramic available as option

## Pump Valves

- Mushroom and ball type in high wear resistant SS alloy
- Stellite and tungsten carbide materials available as option
- Designed symmetrically to be used twice-once on each time

## Pump Body (Gearbox)

- High resistant resin reinforced cast iron
- Heavy duty engineered and vibrationless
- AC motor drive through V belts and pulleys with integrated

## Frame

- Thick stainless-steel material is used for heavy load

## Plungers

- Chrome coated stainless-steel alloy
- Ceramic, HCR chromium and tungsten carbide coated as option
- Solid ceramic as option

## Sealing Components

- Long Lasting Food-grade hygienic material
- EPDM, NBR, FKM, PE, PTFE, ZEDEX, PEEK, TIVAR, Kevlar
- Available with FDA approval

## Technical Data

Motor Power	75 kW
Number of Plungers	3
Lubrication Oil ISO VG 150	32 L
Gear Reducer Oil ISO VG 320	15 L
Water Consumption	120 L

## Performance

Max. Capacity		Max. Pressure	
LTH	GAL/H	BAR	PSI
12500	3300	150	2200
10000	2640	200	2900
8000	2110	250	3600
6000	1590	300	4400
5000	1320	350	5100
4000	1060	400	5800
3000	790	500	7250
2500	660	600	8700
2000	530	750	11000
1500	400	1000	14500
900	230	1500	22000

\*Special desing & manufacturing are made for different pressures & capacities.



HOMMAK®  
Machinery Industry and Trade Inc.

+90 232 257 54 44

info@hommak.com www.hommak.com

Balkan Caddesi No:29 Yazıbaşı / Torbalı - İZMİR

INNOVATIVE  
MANUFACTURING  
Brand



The information contained in this flyer merely serves as a non-binding description of our products and is without guarantee. Binding information in particular relating to capacity data and suitability for specific application can only be provided within the framework of concrete.